Vexve branching valve, hot tapping valve

Series 126xx1, welding / flange, EN (DIN), DN 150 full bore, DN 200 reduced bore, PN 25

DN 150-200

Materials

Body	DN 150-200: Steel, P235GH (1.0345)
Ball	DN 150-200: Stainless steel, X5CrNi18-10 (1.4301)
Stem	DN 150-200: Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 150-200: FPM

Mounting

flange / welding, EN (DIN)

Operation

DN 150-200	with a socket wrench

Operating conditions

Temperature	-20 °C - +200 °C
Leakage rate	A (EN 12266-1)

Below -20 °C contact manufacturer. Lowest allowed ambient temperature -40 °C.

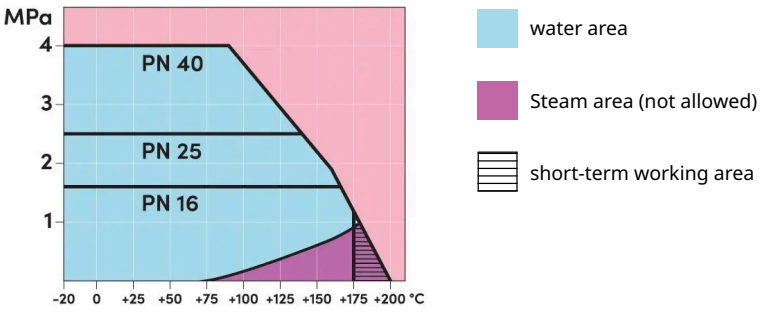

DN 150-200

Series 126xx1, welding / flange, EN (DIN), DN 150 full bore, DN 200 reduced bore, PN 25



DN 150-200



DN 150-200

Dimensions

DN	PN	Product no.	D	D1	D2	D3	D4	D5	H	L	S	HEX1	HEX2	Kg
150	25	126151	150.0	300	250	26	180	273	174	520	10.4	32	65	63
200	25	126201	150.0	360	310	26	180	273	173	523	10.4	32	65	59

*DN 200 reduced bore